


# Stix Electric

## Stix Electric Handset User Guide

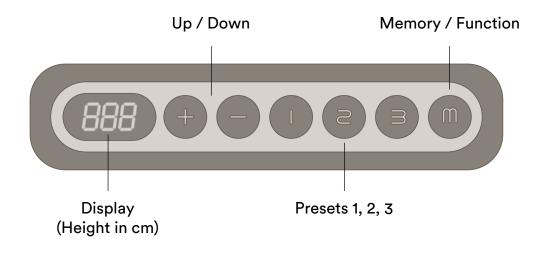

### **Height Adjustment**

- 1. Press + to raise the worktop.
- 2. Press to lower the worktop.

#### **System Reset**

When an ERROR message appears, for example required.



appears.

- 1. Press and hold for 7-10 seconds until "RST"
- 2. Hold until the worktop reaches lowest height, rises slightly & stops.
- 3. Release the button. Your desk is now ready to use.

If ERROR message keeps appearing, contact ThinkingWorks for troublshooting help.

### **Programming Preset Heights**

- 1. Adjust worktop to desired height.
- 2. Press followed by a number button, for example


The pressed number button is now programmed.

3. Once programmed, press preset button and the worktop will automatically travel to the preset height.

CAUTION: Once a preset button is pressed, the desk will move to the user programmed height. Ensure all device cords are appropriate length for worktop travel. There should be no obstacles in the desk's path and the worktop should not contact any walls or objects.

STIX\_ELECTRIC USER GUIDE -14 January 2020 9:41 am

# Stix Electric Handset User Guide

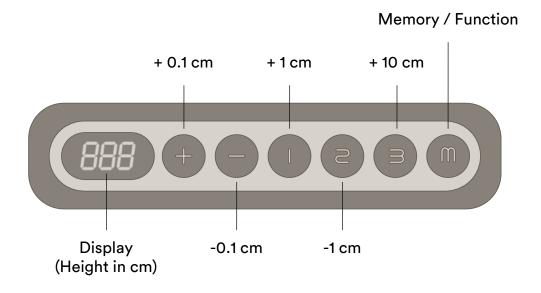

#### **Changing Displayed Height**

Stix frames come pre-programmed to display the height (in cm) to the underside of the worktop. To account for different worktop thicknesses the display can be changed to display finished worktop height.


- 1. Lower worktop to the lowest position.
- 2. Press and hold for 7-10 seconds until "RST" (RST" (RST) appears.
- 3. Press and hold for 3-5 seconds until the display shows

The handset is now in "Display Reset" mode.

- 4. Use the + buttons to adjust the display value.
- 5. Press (M) to save display value.
- 6. Press and hold until display value appears to return to normal operation.

STIX\_ELECTRIC USER GUIDE -14 January 2020 9:41 am

# Stix Electric Handset User Guide

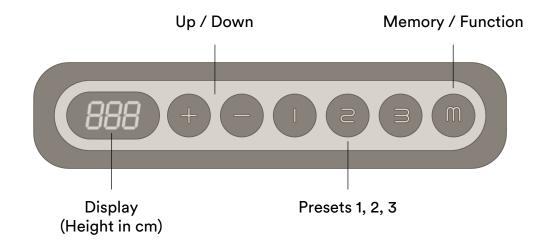

#### **Remove Limits Setting a Lower Limit Setting an Upper Limit** 1. Adjust worktop to desired height. 1. Adjust worktop to desired height. button. 1. Press 2. Press and hold until display shows 2. Press button. 2. Press button. 3. Press button. 3. Press button. The limits have now been removed. 4. Hold until display shows 4. Hold until display shows The lower limit has now been set. The upper limit has now been set.

STIX\_ELECTRIC USER GUIDE - 14. January 2020 9:41 am



#### **Specification**

If you would like a sample set of any of our finishes, please call us on 61 (0)2 9726 7177 or e-mail at sales@thinkingw.com.

Due to our policy of continuous product development, specifications and finishes may change without prior notice.

#### **Sustainability Policy**

We realise the importance of responsible business practices and have in place numerous product and company sustainability certifications. We would encourage you to download our annual Sustainability Report from the Thinking Works website to get a full overview of our sustainability program.

Thinking Works
© Copyright 2019
All right reserved

Thinking Works 25 Helles Avenue Moorebank New South Wales 2170

www.thinkingw.com 61 (0)2 9726 7177 sales@thinkingw.com

STIX\_ELECTRIC USER GUIDE -14 January 2020 9:41 am 5