




Stix Electric

Handset User Guide

Stix Electric Handset User Guide

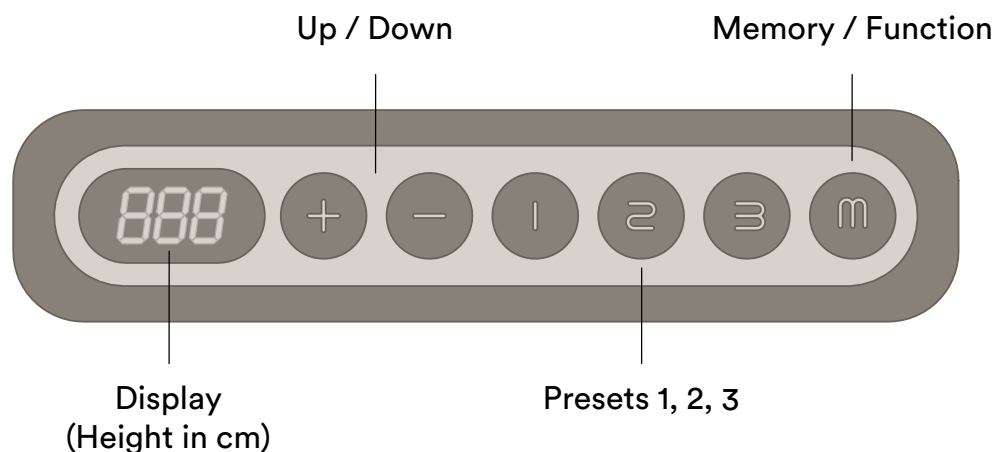

System Reset

When an ERROR message appears, for example  a system reset is required.

1. Press and hold  for 7-10 seconds until "RST"  appears.
2. Hold  until the worktop reaches lowest height, rises slightly & stops.
3. Release the  button. Your desk is now ready to use.

If ERROR message keeps appearing, contact ThinkingWorks for troubleshooting help.

Height Adjustment

1. Press  to raise the worktop.
2. Press  to lower the worktop.

Programming Preset Heights


1. Adjust worktop to desired height.
2. Press  followed by a number button, for example .

The pressed number button is now programmed.

3. Once programmed, press preset button and the worktop will automatically travel to the preset height.

CAUTION: Once a preset button is pressed, the desk will move to the user programmed height. Ensure all device cords are appropriate length for worktop travel. There should be no obstacles in the desk's path and the worktop should not contact any walls or objects.

Stix Electric Handset User Guide

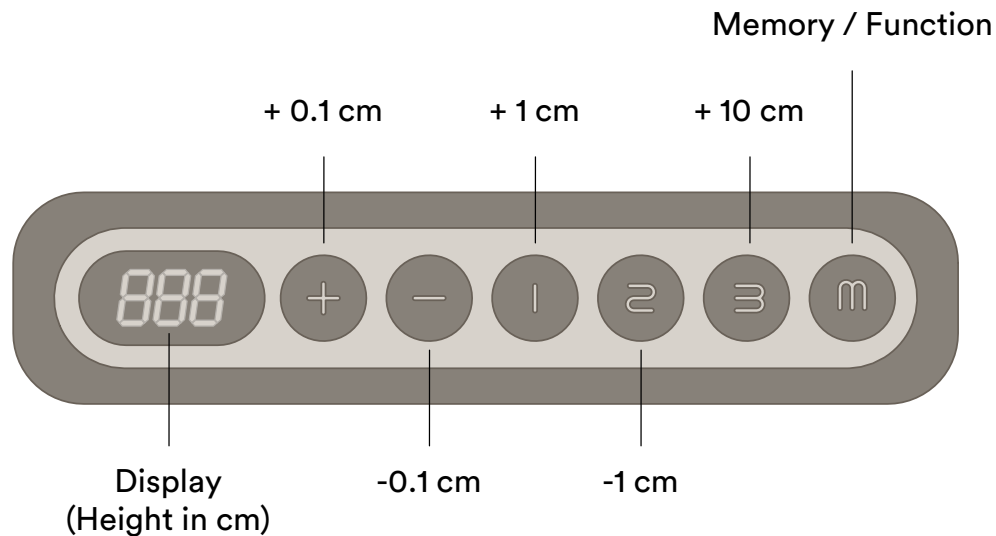

Changing Displayed Height

Stix frames come pre-programmed to display the height (in cm) to the underside of the worktop. To account for different worktop thicknesses the display can be changed to display finished worktop height.

1. Lower worktop to the lowest position.

2. Press and hold  for 7-10 seconds until "RST"  appears.

3. Press and hold  for 3-5 seconds until the display shows .


The handset is now in "Display Reset" mode.

4. Use the      buttons to adjust the display value.

5. Press  to save display value.

6. Press and hold  until display value appears to return to normal operation.

Stix Electric Handset User Guide

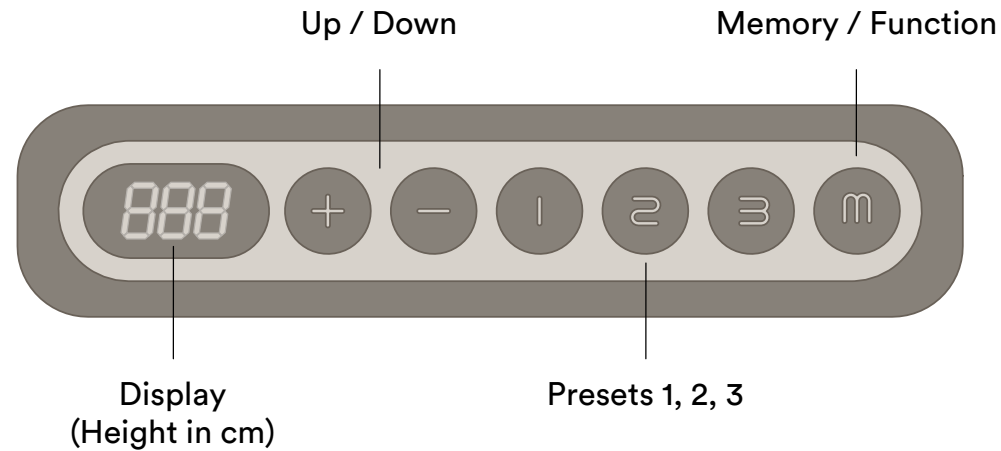

Setting a Lower Limit

1. Adjust worktop to desired height.

2. Press  button.

3. Press  button.

4. Hold  until display shows 

The lower limit has now been set.

Setting an Upper Limit

1. Adjust worktop to desired height.

2. Press  button.

3. Press  button.

4. Hold  until display shows 

The upper limit has now been set.

Remove Limits

1. Press  button.

2. Press and hold  until display shows 

The limits have now been removed.



Specification

If you would like a sample set of any of our finishes, please call us on 61 (0)2 9726 7177 or e-mail at sales@thinkingw.com.

Due to our policy of continuous product development, specifications and finishes may change without prior notice.

Sustainability Policy

We realise the importance of responsible business practices and have in place numerous product and company sustainability certifications. We would encourage you to download our annual Sustainability Report from the Thinking Works website to get a full overview of our sustainability program.

Thinking Works
© Copyright 2019
All right reserved

Thinking Works
Warehouse 2B/M5 Industry Park,
1 Moorebank Avenue, Moorebank, New
South Wales 2170, Australia

P: +61 (0)2 9726 7177
sales@thinkingw.com

www.thinkingw.com